



This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright

**ADVERTISED PLAN**

 **RE Future**

# Mumblin Wind Farm

Application for Planning Permit

Appendix F – Electromagnetic Interference Assessment

October 2025

## Version History

Version	Author	Reviewer	Date	Description
1	VM	SS	23/04/21	Revision 1
2	VM	SS	28/04/21	Revision 2
3	VM	SS	25/11/22	Revision 3
4	VM	SS	23/01/22	Revision 4
5	VM	SS	29/01/22	Revision 5
6	VM	SS	05/07/22	Revision 6
7	AM	SS	07/05/24	Final

# ADVERTISED PLAN

**This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright**

Prepared by  
REF Developments Pty Ltd  
PO Box 739 Geelong VIC 3220

The information contained in this document was produced by RE Future Pty Ltd and is solely for the purpose for which it has been prepared. RE Future Pty Ltd undertakes no duty to or accepts any responsibility to any third party who may rely upon this document. All rights reserved. No section or element of this document may be removed from this document, reproduced, electronically stored or transmitted in any form without the written permission of RE Future Pty Ltd.

## Contents

Version History .....	ii
Contents .....	iii
1 Introduction .....	1
2 Television Broadcasting.....	2
3 Microwave Links.....	5
3.1 Microwave Link Path Obstruction Analysis .....	6
3.1.1 Ayresford – Dixie link.....	6
3.1.2 Mt Warrnambool – Crowes link .....	6
3.1.3 Timboon – Lake Gnotuk link .....	7
3.1.4 Cobden - Mt Shadwell link.....	7
3.2 Near Field Interference Analysis .....	7
4 Conclusion.....	9
References .....	10

# ADVERTISED PLAN

**This copied document to be made available  
for the sole purpose of enabling  
its consideration and review as  
part of a planning process under the  
Planning and Environment Act 1987.  
The document must not be used for any  
purpose which may breach any  
copyright**

## 1 Introduction

The Corangamite Planning Scheme stipulates that wind farm planning permit applications must address the potential impact of the proposal in terms of electromagnetic interference, at both Clause 52.32 and in the *Planning Guidelines for Development of Wind Energy Facilities 2023* (Guidelines). In particular, the Guidelines specify that the potential for proposed wind farms to cause electromagnetic interference (EMI) should be minimised, and preferably eliminated, while siting should avoid 'line of sight' alignment between transmitter and receiver as critical services rely upon the delivery of information via electromagnetic waves, or radio signals.

Critical services depend upon the delivery of information via electromagnetic waves, or radio signals. Electromagnetic interference occurs when the transmission of these radio signals is impaired by obstruction, reflection or spurious emissions. In principle wind farms have the potential to cause electromagnetic interference via the following two mechanisms:

- Reflection: Reflection occurs when electromagnetic waves are reflected off the physical surfaces of a wind turbine or turbines. Where there is a receiver nearby a reflected signal it may receive two signals—i.e. the original and reflected signal—leading to a degradation of signal reception at that receiver location; and
- Emission: Emission occurs when wind turbines or the electrical plant associated with them emit electromagnetic waves. Where there is a receiver nearby a powerful source of emissions two signals may be received—i.e. the original signal and emitted noise—leading to a degradation of signal reception at that receiver location.<sup>1</sup>

In practice only one of these mechanisms has been shown to cause electromagnetic interference, namely reflection.<sup>2</sup> Because modern wind turbines and their associated infrastructure are required to meet a stringent electrical engineering standard, they emit very small amounts of electromagnetic radiation. This means that wind farms do not have the potential to cause EMI due to emission. However, due to their large size and location on exposed hilltops, there is the potential for wind farms to be located in proximity to transmitters or receivers, or line of site between a transmitter and a receiver, and thereby cause EMI by reflecting electromagnetic waves.

The services that are theoretically susceptible to EMI in this way are:

- Television broadcasting
- Radio broadcasting
- Mobile phone services
- Navigational systems (VOR, DVOR, ILS, LORANC, and radar) and
- Microwave links.<sup>3</sup>

<sup>1</sup> Hall, S. 'The Assessment and Avoidance of Electromagnetic Interference Due to Wind Farms,' *Wind Engineering*, Vol. 16, No. 6, 1992; Sengupta D. & Senior T., 'Electromagnetic Interference from Wind Turbines,' in Spera, D., (ed.) *Wind Turbine Technology: Fundamental Concepts of Wind Turbine Engineering*, New York: ASME Press, 1994.

<sup>2</sup> Ibid.

<sup>3</sup> Ibid.

In practice only two of these services have proven to be affected by wind farm developments, namely television broadcasting and microwave links.<sup>4</sup> While radio broadcasting (AM and FM) is affected, it is only affected within a few tens of metres of a wind turbine, meaning the effect of wind turbine developments on radio broadcasting is negligible. Mobile phone services are designed to work in and around buildings and therefore already withstand any interference that would be posed by a wind farm development. Navigational systems are susceptible to interference from wind turbines; they are generally located in areas where wind farms are not—such as airports and major cities—and as such are rarely affected by wind farm developments. Nevertheless, the potential impact of the wind farm on aeronautical navigational systems is assessed in the Mumblin Wind Farm Aeronautical Impact Assessment, which forms part of the planning application documentation for this proposed wind farm.

This leaves digital television broadcasting and microwave links as the two telecommunications systems most likely to be affected by a wind farm development. These two kinds of EMI are discussed in turn below.

## 2 Television Broadcasting

Television broadcasting systems consist of a transmitter (or a series of transmitters) which broadcast electromagnetic waves in the UHF band. These signals are sent to a large area in all directions.

There are two ways in which a wind farm can interfere with television broadcasting, namely large-scale and small-scale interference. Small scale interference occurs when a wind farm interferes with television reception in its immediate vicinity by degrading the signal at its point of reception—i.e. a house. Since the switch to digital television the risk of wind farms causing small scale interference has effectively been negated as digital television requires a much lower signal strength in order to deliver excellent video, meaning that even if a wind farm is causing a degradation of television signal, that signal will generally be strong enough for a digital receiver to produce excellent video. It is for this reason that, prior to the switch over, digital television was used as an amelioration option for dwellings that were affected by wind farm developments. Accordingly, except in rare cases where reception is marginal in the first instance, wind farms no longer pose a risk of causing small scale interference to television broadcasting.

In the case of the proposed Mumblin Wind Farm, the area surrounding the wind farm is well served by four digital television broadcast stations: Mt Noorat, located 16.2 km north of WTG 1, Camperdown, located 18.8 km north-east of WTG 5, Timboon, located 11.6 km south of WTG 8, and Warrnambool, located 38.7 km west-south-west of WTG 1. Though it's highly unlikely that the wind farm will cause sufficient reflection to bring about interference to digital television reception at nearby residences, should interference occur at any

<sup>4</sup> Sengupta et. al., 'Electromagnetic Interference from Wind Turbines.'

dwelling, redirecting the antenna in question toward an alternative broadcast site would remedy this interference. The location of digital television broadcast stations to the north, north-east, south and west of the wind farm is such that this amelioration option is available to all dwellings. Figure 1 shows the location of television broadcast sites in the vicinity of the wind farm.

Large scale interference occurs when a wind farm development interacts with a broadcast site and therefore interferes with the broadcast signal at its point of transmission, thereby affecting the entire coverage area associated with it. Large scale interference can be avoided by ensuring that wind turbines are not located in the near vicinity of broadcast stations. It is generally recommended that wind farms should be located at least 6 km from primary television transmitters, and 1 km relay transmitters.<sup>5</sup> According to official transmitter data from the Australian Media and Communications Authority (ACMA) the nearest television broadcast site to the proposed wind farm is located at Timboon, a distance of 11.6 km to the south — see Figure 1 below.<sup>6</sup> The proposed wind farm will therefore not cause large scale interference to television broadcasting.

## ADVERTISED PLAN

**This copied document to be made available  
for the sole purpose of enabling  
its consideration and review as  
part of a planning process under the  
Planning and Environment Act 1987.  
The document must not be used for any  
purpose which may breach any  
copyright**

---

<sup>5</sup> Hall, S. 'The Assessment and Avoidance of Electromagnetic Interference Due to Wind Farms.'

<sup>6</sup> <http://www.acma.gov.au/Industry/Spectrum/Radiocomms-licensing/Apparatus-licences/list-of-licensed-broadcasting-transmitters>. Accessed 14/08/2024.

# Mumblin Wind Farm

## Television Broadcast Sites in the Vicinity of the Wind Farm

Legend



DTV transmitter




Subject Site

Drawn VM Scale when printed at A3 1:300,000

Checked SS Date 07-05-2025


Approved SS Figure 1

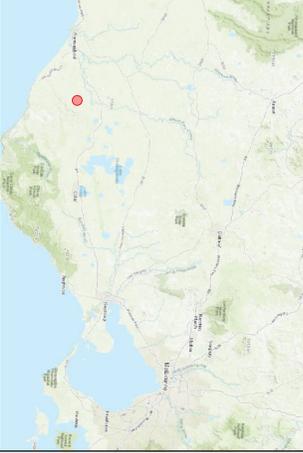

DATA SOURCES: © Vicmap/MapInfo/State of Victoria, 2020. REF: rfr-2020.  
COPYRIGHT / DISCLAIMER: The concepts and information contained in this document are the copyright of REFUTURE. Use or copying of the document in whole or in part without the written permission of REFUTURE constitutes an infringement of copyright. REFUTURE does not warrant that this document or the information contained herein is accurate, complete, or up to date, and is provided from reliance upon information provided herein.



630000  
640000  
650000  
660000  
670000  
680000  
690000  
700000  
710000

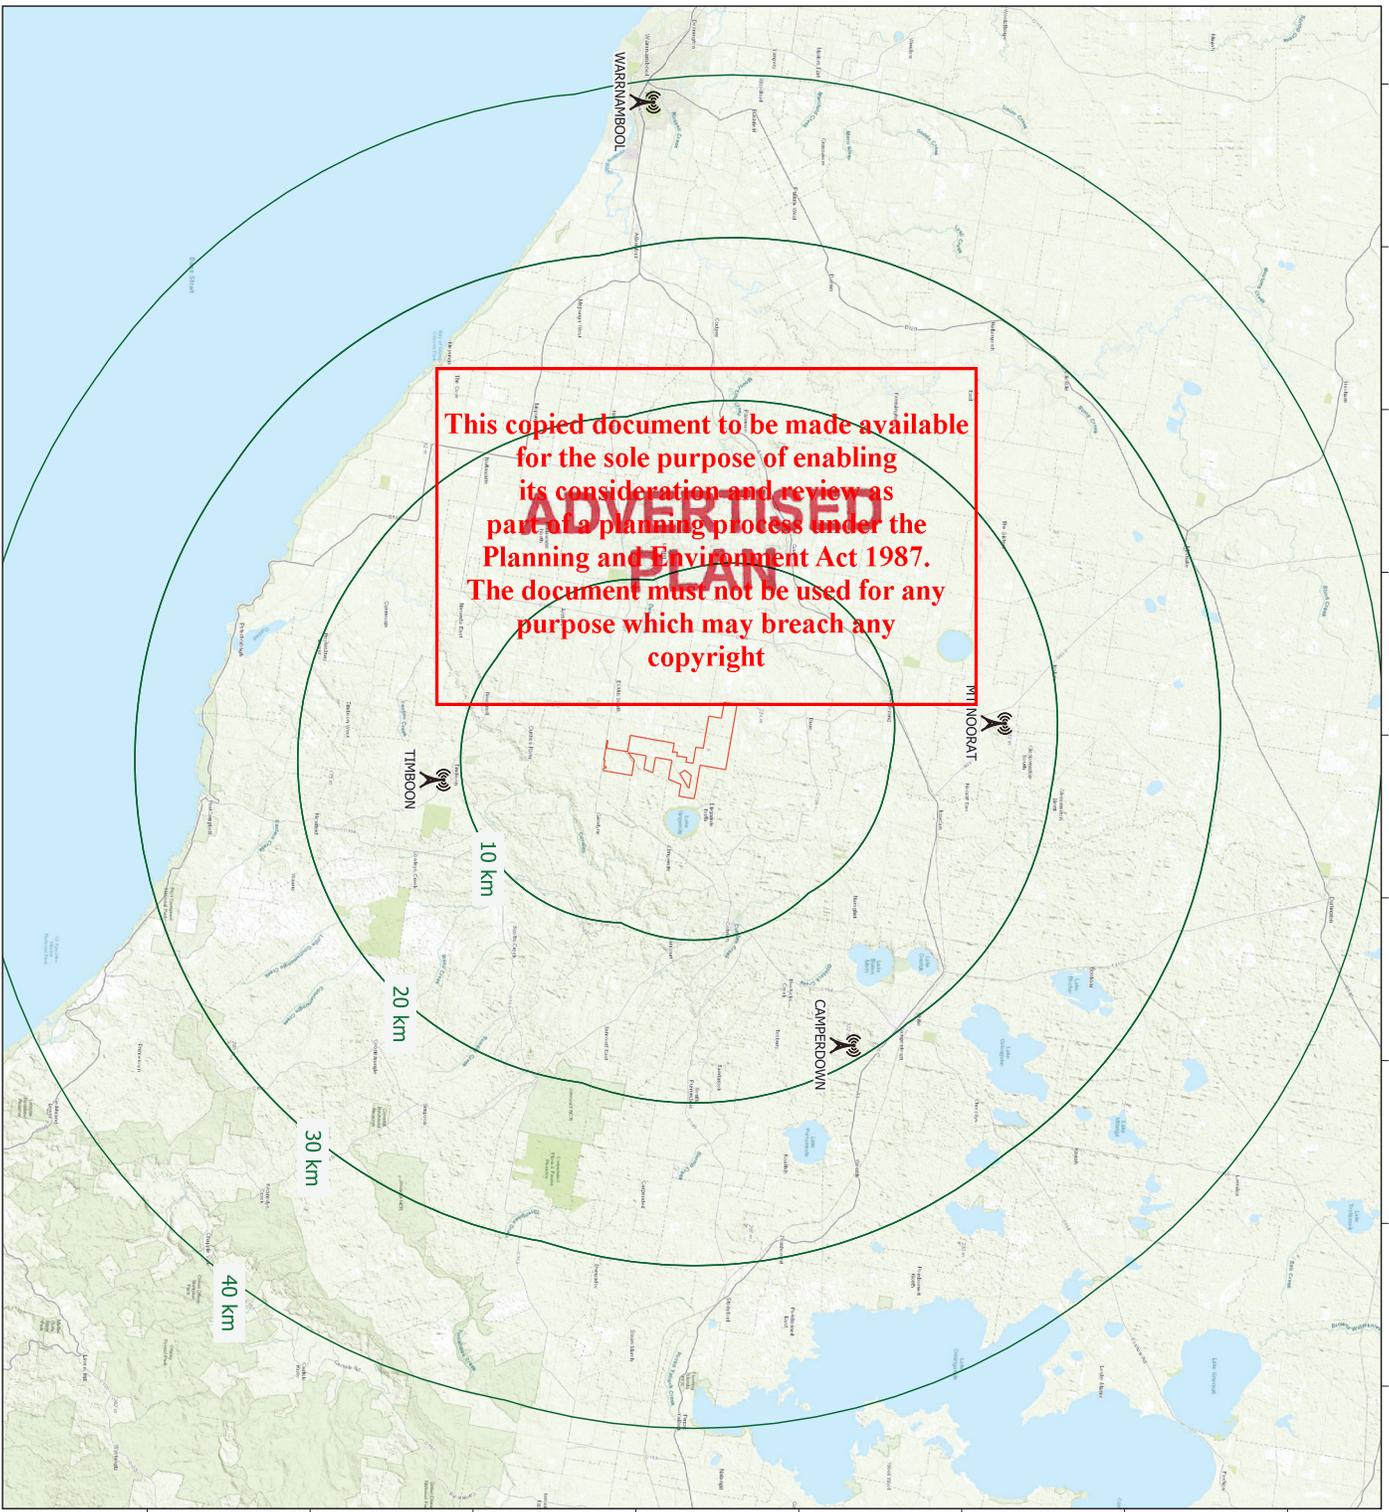

**This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright**

5720000 5730000 5740000 5750000 5760000 5770000 5780000 5790000

### 3 Microwave Links

Unlike television broadcasting, which emanates from a single point and is broadcast to a large area, microwave links transfer information between single points, or from point to point. These systems operate in the super high frequency range, sending and receiving highly focused signals between transmitters and receivers.

The path of these signals is effectively identical to the line of sight between a transmitter and a receiver; however it is not limited to a straight line. Rather the path of a microwave link covers an elliptical area surrounding the central path of the beam known as the Fresnel Zone. The Fresnel Zone consists of a series of concentric ellipses of increasing radius from the centre point of the beam, usually termed the first, second and third Fresnel Zones. The radius of these Fresnel Zones is a function of the distance between the transmitter and the receiver, and the wavelength of the signal, as per the simple formula shown below.

$$R_n = \sqrt{\frac{n\lambda D_1 D_2}{D_1 + D_2}}$$

Where:

$R_n$  = radius of the nth Fresnel Zone

$n$  = Fresnel Zone number

$\lambda$  = wavelength

$D_1$  = distance between transmitter and point of interest (wind farm)

$D_2$  = distance between receiver and point of interest (wind farm)

**This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright**

A graphical representation of the Fresnel Zone around a microwave link is shown below.

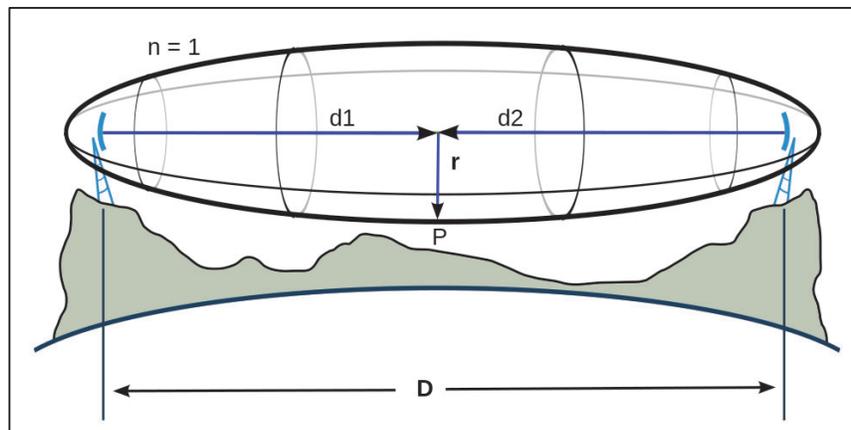


Figure 2: Geometry of a Fresnel Zone Around a Microwave Link

**ADVERTISED  
PLAN**

There are two ways in which a wind farm development can cause interference to a microwave link, path obstruction and near field interference.<sup>7</sup> Path obstruction occurs when a physical object is sited in the path of a microwave link, otherwise known as the Fresnel Zone. To avoid causing interference via path obstruction it is generally recommended that wind turbines be located outside of the second Fresnel Zone of a microwave link.<sup>8</sup> The nearest microwave links to the wind farm have been identified using official data from ACMA.<sup>9</sup> These links are shown in Figure 3 while their details, including Fresnel Zone radii and minimum setbacks to the nearest wind turbine generator, are listed in Table 1. As can be seen in Table 1 the proposed wind farm will not encroach on the second Fresnel Zone of any point-to-point radio links. A discussion of each of these links is provided below Table 1.

**Table 1: Fresnel Zone Radii of Nearest Microwave Link**

Microwave link	Length (km)	Min Frequency (GHz)	Maximum Radius (m)	Min setback required (m)*	Min setback to a WTG (m)
Ayresford - Dixie	9.7	11.075	11.1	147.5	1863.3
Mt Warrnambool - Crowes	69.1	0.4506	151.7	287.7	5031.9
Lake Gnotuk – Timboon	30.9	0.404225	107.1	243.1	5934.4
Cobden – Mt Shadwell	38.2	0.4507	112.8	248.8	6183.1

\*Based on Vestas V172 (with a blade length of 86 m). Distance measured from the centre of the WTG tower and includes a 50 m buffer.

### 3.1 Microwave Link Path Obstruction Analysis

#### 3.1.1 Ayresford – Dixie link

ACMA data specifies that this microwave link has a minimum frequency of 11.075 MHz, and a calculated maximum second Fresnel Zone radius of 11.1 m midpoint along its 9.7 km length. At its closest point this link passes to the north-west of the wind farm adjacent to wind turbine one (T1) at a distance of 1863 m when 0.9 km along its path. Given this link has a maximum second Fresnel Zone radius of 11.1 m the proposed wind farm does not pose a risk of causing interference to this microwave link via path obstruction.

#### 3.1.2 Mt Warrnambool – Crowes link

ACMA data specifies that this microwave link has a minimum frequency of 450.6 MHz, and a calculated maximum second Fresnel Zone radius of 151.7 m midpoint along its 69.1 km length. At its closest point this link passes to the south-east of the wind farm adjacent to wind turbine seven (T7) at a distance of 5031.9 m when 19.8 km along its path. Given this link has a maximum second Fresnel Zone radius of 151.7 m the proposed wind farm does not pose a risk of causing interference to this microwave link via path obstruction.

<sup>7</sup> Hall, S. 'The Assessment and Avoidance of Electromagnetic Interference Due to Wind Farms;' Sengupta et. al., 'Electromagnetic Interference from Wind Turbines.'

<sup>8</sup> Ibid.

<sup>9</sup> [http://web.acma.gov.au/pls/radcom/register\\_search.main\\_page](http://web.acma.gov.au/pls/radcom/register_search.main_page). Accessed 14/08/2024.

### 3.1.3 Timboon – Lake Gnotuk link

ACMA data specifies that this microwave link has a minimum frequency of 404.225 MHz, and a calculated maximum second Fresnel Zone radius of 107.1 m midpoint along its 30.9 km length. At its closest point this link passes to the south-west of the wind farm adjacent to wind turbine eight (T8) at a distance of 5934.4 m when 9.9 km along its path. Given this link has a maximum second Fresnel Zone radius of 107.1 m the proposed wind farm does not pose a risk of causing interference to this microwave link via path obstruction.

### 3.1.4 Cobden - Mt Shadwell link

ACMA data specifies that this microwave link has a minimum frequency of 450.7 MHz, and a calculated maximum second Fresnel Zone radius of 112.8 m at the midpoint along its 38.2 km length. At its closest point the link passes north-east of the wind farm adjacent to wind turbine five (T5) at a distance of 6183.1 m when 2.9 km along its path respectively. Given this link has a maximum second Fresnel Zone radius of 112.8 m the proposed wind farm does not pose a risk of causing interference to this microwave link via path obstruction.

## 3.2 Near Field Interference Analysis

The near field is a region surrounding every transmitter and receiver within which they are highly susceptible to interference. Different telecommunications systems have different sensitivities to near field interference. In the case of microwave links the transmitters and receivers used for relaying signals are highly sensitive, meaning the area within which they are susceptible to near field interference is quite large. The extent of the near field is a function of the diameter of the antenna and wavelength of the signal, as per the equation shown below.

$$D_f = 2D^2/\lambda$$

Where:

$D_f$  = linear extent of the near field zone

D = diameter of antenna

$\lambda$  = wavelength

**This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright**

However, a conservative recommendation is that near field interference can be avoided by ensuring that wind turbine generators are located at least 1 km from a transmitter or receiver. According to official ACMA data the nearest transmitter or receiver to the wind farm site is located at Dixie at a distance of 2.1 km to the north-west of wind turbine one (T1).<sup>10</sup> At this distance, the proposed wind farm will not cause interference via near field interference.

**ADVERTISED  
PLAN**

<sup>10</sup> [http://web.acma.gov.au/pls/radcom/register\\_search.main\\_page](http://web.acma.gov.au/pls/radcom/register_search.main_page). Accessed 14/08/2024.

# Mumblyn Wind Farm

## Microwave Links in the Vicinity of the Wind Farm


### Legend

-  Wind turbine
-  Microwave link


Drawn VM Scale when printed at A3 1:60,000

Checked SS Date 14-08-2024

Approved SS Figure 3

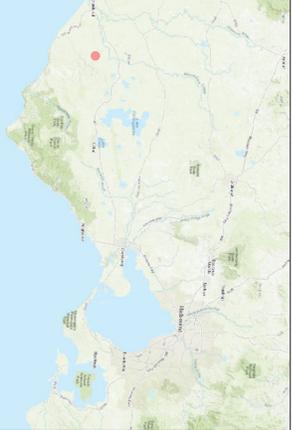

DATA SOURCES: Environment Australia 2020, REFUTURE 2020.  
 COPYRIGHT / LICENSARS: This content and information is contained in this document with the permission of REFUTURE. Use or copying of the document in whole or in part without the written permission of REFUTURE constitutes an infringement of copyright. REFUTURE does not warrant that this document is definitive nor free of error and does not accept liability for any loss caused or arising from reliance upon information provided herein.

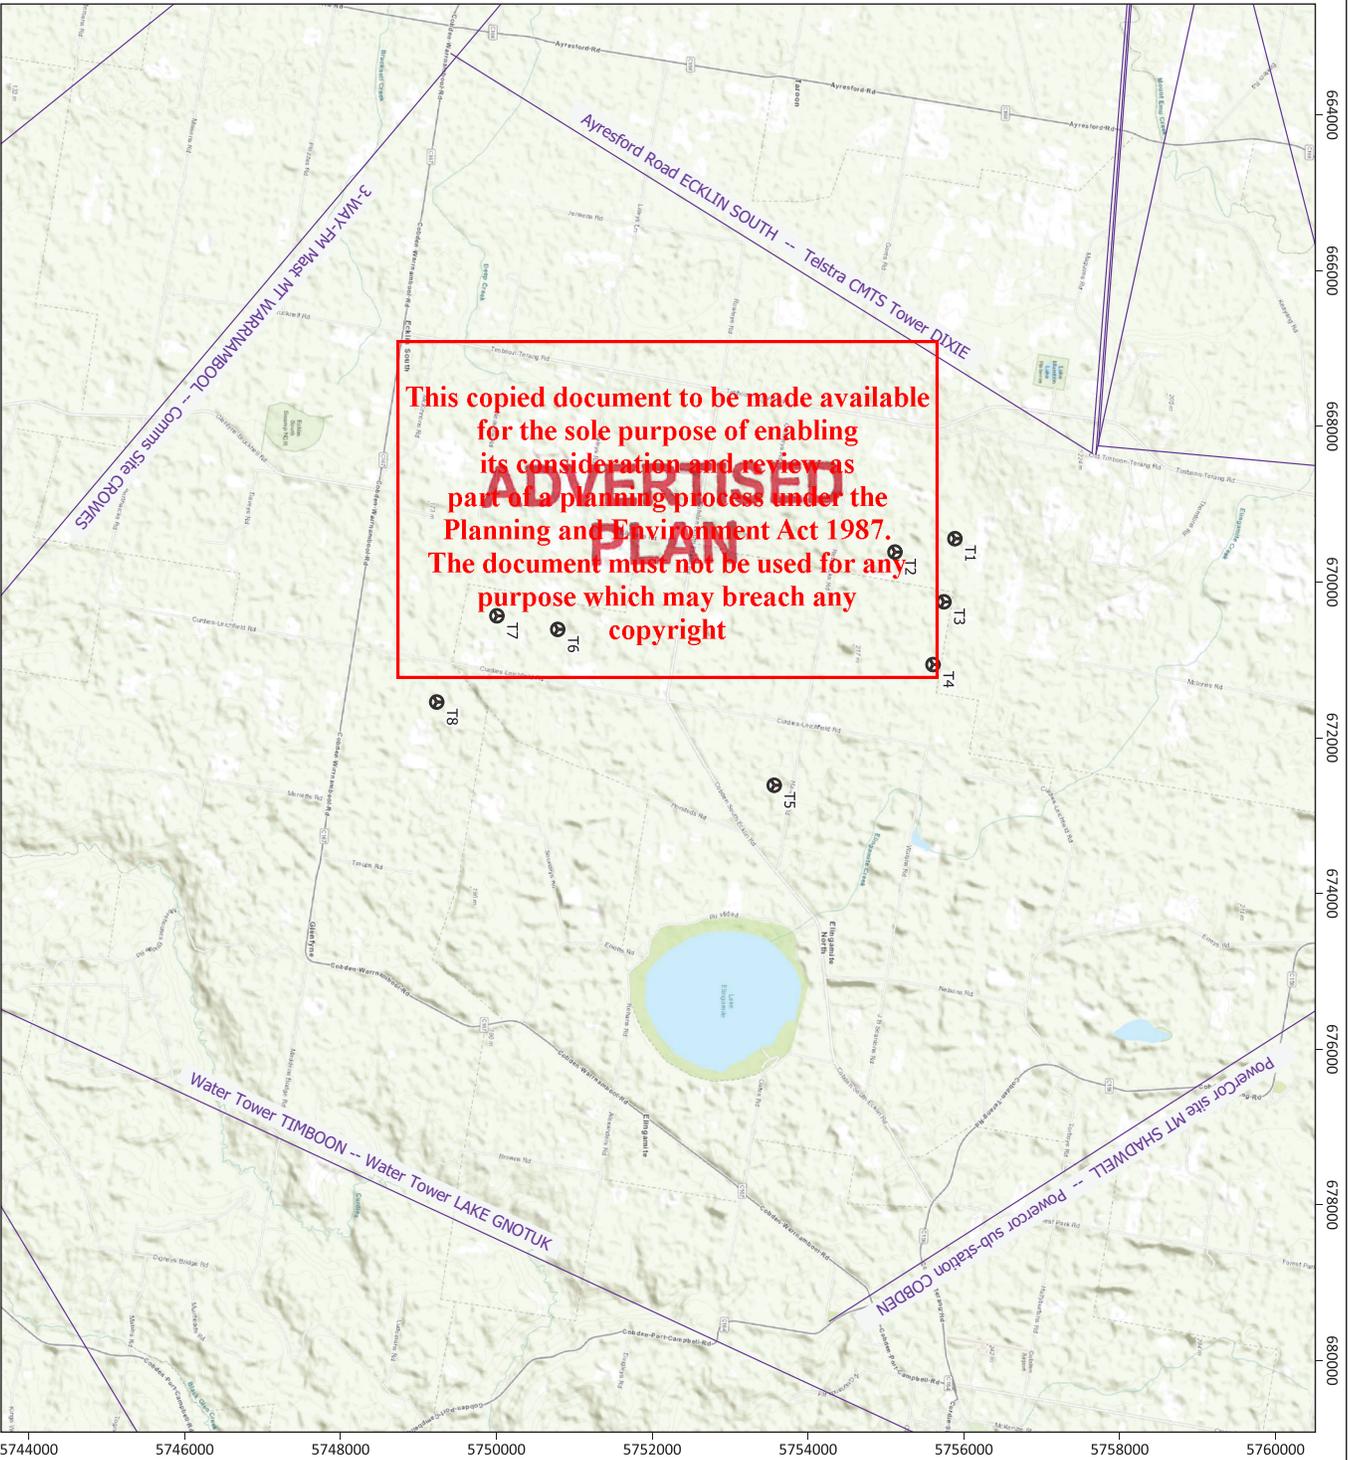

#### 4 Conclusion

The potential impact of the proposed wind farm on television broadcasting and point-to-point radio links has been considered in this report. According to official data from the Australian Communications and Media Authority the nearest digital television broadcast site is 11.6 km from the nearest wind turbine (WTG) of the proposed Mumblin Wind Farm. At this distance, the wind farm will not be capable of causing either small-scale or large-scale interference to television broadcasting. Similarly, ACMA data shows that the nearest microwave transmitter or receiver is located 2.1 km from the nearest wind turbine generator, and as such will not be at risk near field interference. Finally, ACMA data reveals that the wind farm is located outside the second Fresnel Zone of the nearest microwave link, which has a second Fresnel zone radius of 11.5 m and is located 1863.3 m from the nearest turbines. Accordingly, the Mumblin Wind Farm does not pose a risk to either television broadcasting or microwave link activity.

## ADVERTISED PLAN

**This copied document to be made available  
for the sole purpose of enabling  
its consideration and review as  
part of a planning process under the  
Planning and Environment Act 1987.  
The document must not be used for any  
purpose which may breach any  
copyright**

## References

- Australian Communications and Media Authority (ACMA). Broadcast Transmitter Data, <http://www.acma.gov.au/Industry/Spectrum/Radiocomms-licensing/Apparatus-licences/list-of-licensed-broadcasting-transmitters>, accessed 14/08/2024.
- Australian Communications and Media Authority (ACMA). Register of Radiocommunications Licences, [http://web.acma.gov.au/pls/radcom/register\\_search.main\\_page](http://web.acma.gov.au/pls/radcom/register_search.main_page), accessed 14/08/2024.
- Hall, S. 'The Assessment and Avoidance of Electromagnetic Interference Due to Wind Farms,' *Wind Engineering*, Vol. 16, No. 6, 1992.
- Sengupta D. & Senior T., 'Electromagnetic Interference from Wind Turbines,' in Spera, D., (ed.) *Wind Turbine Technology: Fundamental Concepts of Wind Turbine Engineering*, New York: ASME Press, 1994.

# ADVERTISED PLAN

**This copied document to be made available for the sole purpose of enabling its consideration and review as part of a planning process under the Planning and Environment Act 1987. The document must not be used for any purpose which may breach any copyright**